

Handling Exceptions

What Will I Learn?

In this lesson, you will learn to:

- Describe several advantages of including exception handling code in PL/SQL
- Describe the purpose of an EXCEPTION section in a PL/SQL block
- Create PL/SQL code to include an EXCEPTION section
- List several guidelines for exception handling




Why Learn It?

You have learned to write PL/SQL blocks with a declarative section and an executable section.

All the SQL and PL/SQL code that must be executed is written in the executable block. So far you have assumed that the code works fine if you take care of compile time errors.

However, the code can cause some unanticipated errors at run time. In this lesson, you learn how to deal with such errors in the PL/SQL block.

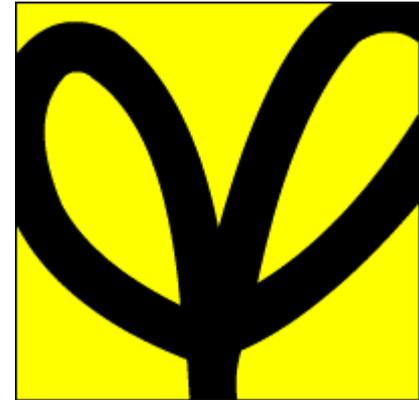

Tell Me / Show Me

What is an Exception?

An exception occurs when an error is discovered during the execution of a program that disrupts the normal operation of the program.



There are many possible causes of exceptions: a user makes a spelling mistake while typing; a program does not work correctly; an advertised web page does not exist; and so on.

Can you think of errors that you have come across while using a web site or application?



Tell Me / Show Me

Exceptions in PL/SQL

```
DECLARE
  v_country_name wf_countries.country_name%TYPE
                                     := 'Republic of Korea';
  v_elevation    wf_countries.highest_elevation%TYPE;
BEGIN
  SELECT highest_elevation
     INTO v_elevation
     FROM wf_countries
     WHERE country_name = v_country_name;
  DBMS_OUTPUT.PUT_LINE(v_country_name);
END;
```

```
Republic of Korea
```

```
Statement processed.
```

This example works fine. But what if you entered Korea, South instead of Republic of Korea?



Tell Me / Show Me

Exceptions in PL/SQL (continued)

```
DECLARE
  v_country_name wf_countries.country_name%TYPE
                := 'Korea, South';
  v_elevation    wf_countries.highest_elevation%TYPE;
BEGIN
  SELECT highest_elevation
     INTO v_elevation
     FROM wf_countries
     WHERE country_name = v_country_name;
END;
```

Tell Me / Show Me

Exceptions in PL/SQL (continued)

Observe that the code does not work as expected. No data was found for Korea, South because the country name is actually stored as Republic of Korea.

```
ORA-01403: no data found
```

This type of error in PL/SQL is called an exception. When an exception occurs, you say that the exception has been “raised.”

When an exception is raised, the rest of the execution section of the PL/SQL block is not executed.

Tell Me / Show Me

What Is an Exception Handler?

An exception handler is code that defines the recovery actions to be performed when an exception is raised (that is, when an error occurs).

When writing code, programmers need to anticipate the types of errors that can occur during the execution of that code. They need to include exception handlers in their code to address these errors. In a sense, exception handlers allow programmers to "bulletproof" their code.

Tell Me / Show Me

What Is an Exception Handler? (continued)

What types of errors might programmers want to account for by using an exception handler?

- System errors (for example, a hard disk is full)
- Data errors (for example, trying to duplicate a primary key value)
- User action errors (for example, data entry error)
- Many other possibilities!

Tell Me / Show Me

Why Is Exception Handling Important?

Can you think of some reasons why exception handling is important?

Tell Me / Show Me

Why is Exception Handling Important? (continued)

Some reasons include:

- Protects the user from errors (frequent errors can frustrate the user and/or cause the user to quit the application)
- Protects the database from errors (data can be lost or overwritten)
- Major errors take a lot of system resources (if a mistake is made, correcting the mistake can be costly; users might frequently call the help desk for assistance with errors).
- Code is more readable because error-handling routines can be written in the same block in which the error occurred.



Tell Me / Show Me

Handling Exceptions with PL/SQL

A block always terminates when PL/SQL raises an exception, but you can specify an exception handler to perform final actions before the block ends. The exception section begins with the keyword `EXCEPTION`.

```
DECLARE
  v_country_name wf_countries.country_name%TYPE := 'Korea, South';
  v_elevation    wf_countries.highest_elevation%TYPE;
BEGIN
  SELECT highest_elevation INTO v_elevation
    FROM wf_countries WHERE country_name = v_country_name;
EXCEPTION
  WHEN NO_DATA_FOUND THEN
    DBMS_OUTPUT.PUT_LINE ('Country name, ' || v_country_name || ',
      cannot be found. Re-enter the country name using the correct
      spelling. ');
END;
```

Tell Me / Show Me

Handling Exceptions with PL/SQL (continued)

When an exception is handled, the PL/SQL program does not terminate abruptly. When the exception is raised, the control shifts to the exception section and the handler in the exception section is executed. The PL/SQL block terminates with normal, successful completion.

```
Country name, Korea, South,  
cannot be found. Re-enter the country name using the correct spelling.
```

```
Statement processed.
```

Only one exception can occur at a time. When an exception occurs, PL/SQL processes only one handler before leaving the block.



Tell Me / Show Me

Handling Exceptions with PL/SQL (continued)

```
DECLARE
  v_country_name wf_countries.country_name%TYPE := 'Korea, South';
  v_elevation    wf_countries.highest_elevation%TYPE;
BEGIN
  SELECT highest_elevation INTO v_elevation
    FROM wf_countries WHERE country_name = v_country_name;
  DBMS_OUTPUT.PUT_LINE(v_elevation); -- Point A
EXCEPTION
  WHEN NO_DATA_FOUND THEN
    DBMS_OUTPUT.PUT_LINE ('Country name, ' || v_country_name || ',
      cannot be found. Re-enter the country name using the correct
      spelling. ');
END;
```

The code at point A does not execute because the SELECT statement failed.

Tell Me / Show Me

Handling Exceptions with PL/SQL (continued)

The following is another example. The select statement in the block is retrieving the `last_name` of Stock Clerks.

```
DECLARE
  v_lname VARCHAR2(15);
BEGIN
  SELECT last_name INTO v_lname
     FROM employees WHERE job_id = 'ST_CLERK';
  DBMS_OUTPUT.PUT_LINE('The last name of the ST_CLERK is :
  ' || v_lname);
END;
```

However, an exception is raised because more than one `ST_CLERK` exists in the data.

```
ORA-01422: exact fetch returns more than requested number of rows
```



Tell Me / Show Me

Handling Exceptions with PL/SQL (continued)

The following code includes a handler for a predefined Oracle server error called `TOO_MANY_ROWS`. You will learn more about predefined server errors in the next lesson.

```
DECLARE
  v_lname employees.last_name%TYPE;
BEGIN
  SELECT last_name INTO v_lname
     FROM employees WHERE job_id = 'ST_CLERK';
  DBMS_OUTPUT.PUT_LINE('The last name of the ST_CLERK is :
  ' || v_lname);
EXCEPTION
  WHEN TOO_MANY_ROWS THEN
    DBMS_OUTPUT.PUT_LINE (' Your select statement retrieved
  multiple rows. Consider using a cursor. ');
END;
```



Tell Me / Show Me

Trapping Exceptions

You can handle or "trap" any error by including a corresponding handler within the exception handling section of the PL/SQL block.

Syntax:

```
EXCEPTION
  WHEN exception1 [OR exception2 . . .] THEN
    statement1;
    statement2;
    . . .
  [WHEN exception3 [OR exception4 . . .] THEN
    statement1;
    statement2;
    . . .]
  [WHEN OTHERS THEN
    statement1;
    statement2;
    . . .]
```



Tell Me / Show Me

Trapping Exceptions (continued)

Each handler consists of a `WHEN` clause, which specifies an exception name, followed by a sequence of statements to be executed when that exception is raised. You can include any number of handlers within an `EXCEPTION` section to handle specific exceptions. However, you cannot have multiple handlers for a single exception.

```
EXCEPTION
  WHEN exception1 [OR exception2 . . .] THEN
    statement1;
    statement2;
    . . .
  [WHEN OTHERS THEN
    statement1;
    statement2;
    . . .]
```

Tell Me / Show Me

Trapping Exceptions (continued)

In the syntax:

- *exception* is the standard name of a predefined exception or the name of a user-defined exception declared within the declarative section
- *statement* is one or more PL/SQL or SQL statements
- OTHERS is an optional exception-handling clause that traps any exceptions that have not been explicitly handled

```
EXCEPTION
  WHEN exception1 [OR exception2 . . .] THEN
    statement1;
    statement2;
    . . .
  [WHEN OTHERS THEN
    statement1;
    statement2;
    . . .]
```



Tell Me / Show Me

The OTHERS Exception Handler

The exception-handling section traps only those exceptions that are specified; any other exceptions are not trapped unless you use the OTHERS exception handler. The OTHERS handler traps all the exceptions that are not already trapped.

If used, OTHERS must be the last exception handler that is defined.

```
EXCEPTION
  WHEN exception1 [OR exception2 . . .] THEN
    statement1;
    statement2;
    . . .
  [WHEN OTHERS THEN
    statement1;
    statement2;
    . . .]
```

Tell Me / Show Me

The OTHERS Exception Handler (continued)

Consider the following example: If the exception `NO_DATA_FOUND` is raised by the program, then the statements in the corresponding handler are executed. If the exception `TOO_MANY_ROWS` is raised, then the statements in the corresponding handler are executed. However, if some other exception is raised, then the statements in the `OTHERS` exception handler are executed.

```
EXCEPTION
  WHEN NO_DATA_FOUND THEN
    statement1;
    ...
  WHEN TOO_MANY_ROWS THEN
    statement2;
    ...
  WHEN OTHERS THEN
    statement3;
```

Tell Me / Show Me

Guidelines for Trapping Exceptions

- Always add exception handlers whenever there is a possibility of an error occurring. Errors are especially likely during calculations, string manipulation, and SQL database operations.
- Handle named exceptions whenever possible, instead of using `OTHERS` in exception handlers. Learn the names and causes of the predefined exceptions.
- Test your code with different combinations of bad data to see what potential errors arise.
- Write out debugging information in your exception handlers.
- Carefully consider whether each exception handler should commit the transaction, roll it back, or let it continue. No matter how severe the error is, you want to leave the database in a consistent state and avoid storing any bad data.


Tell Me / Show Me

Terminology

Key terms used in this lesson include:

Exception


Exception handler

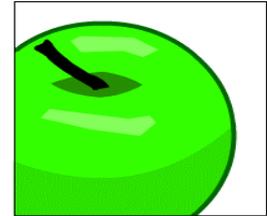

Summary

In this lesson, you learned to:

- Describe several advantages of including exception handling code in PL/SQL
- Describe the purpose of an EXCEPTION section in a PL/SQL block
- Create PL/SQL code to include an EXCEPTION section
- List several guidelines for exception handling

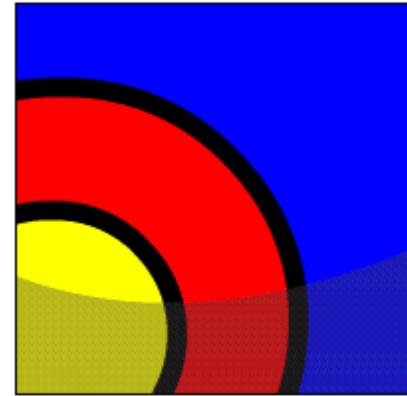

Try It / Solve It

The exercises in this lesson cover the following topics:

- Explaining the importance of exception handling
- Describing what an exception is and how to handle it in PL/SQL programs
- Creating PL/SQL code to include an EXCEPTION section
- Following guidelines for exception handling

